

K2FA (DIN) Bent Axis Pumps


New Design- Bi-Directional Rotation, High Pressure Hydraulic Bent Axis Piston Pumps, 380/420 BAR Working Pressure. High Rotational Speed, High Efficiency, Slim Design, Cast Iron Pump Body, Re-Designed.

Designation;

5cc, 10cc, 12cc, 18cc, 25cc, 32cc, 41cc, 50cc,
56cc, 63cc, 80cc, 108cc, 130cc


**Bi-Directional
Rotation**

**420 BAR
High Pressure**

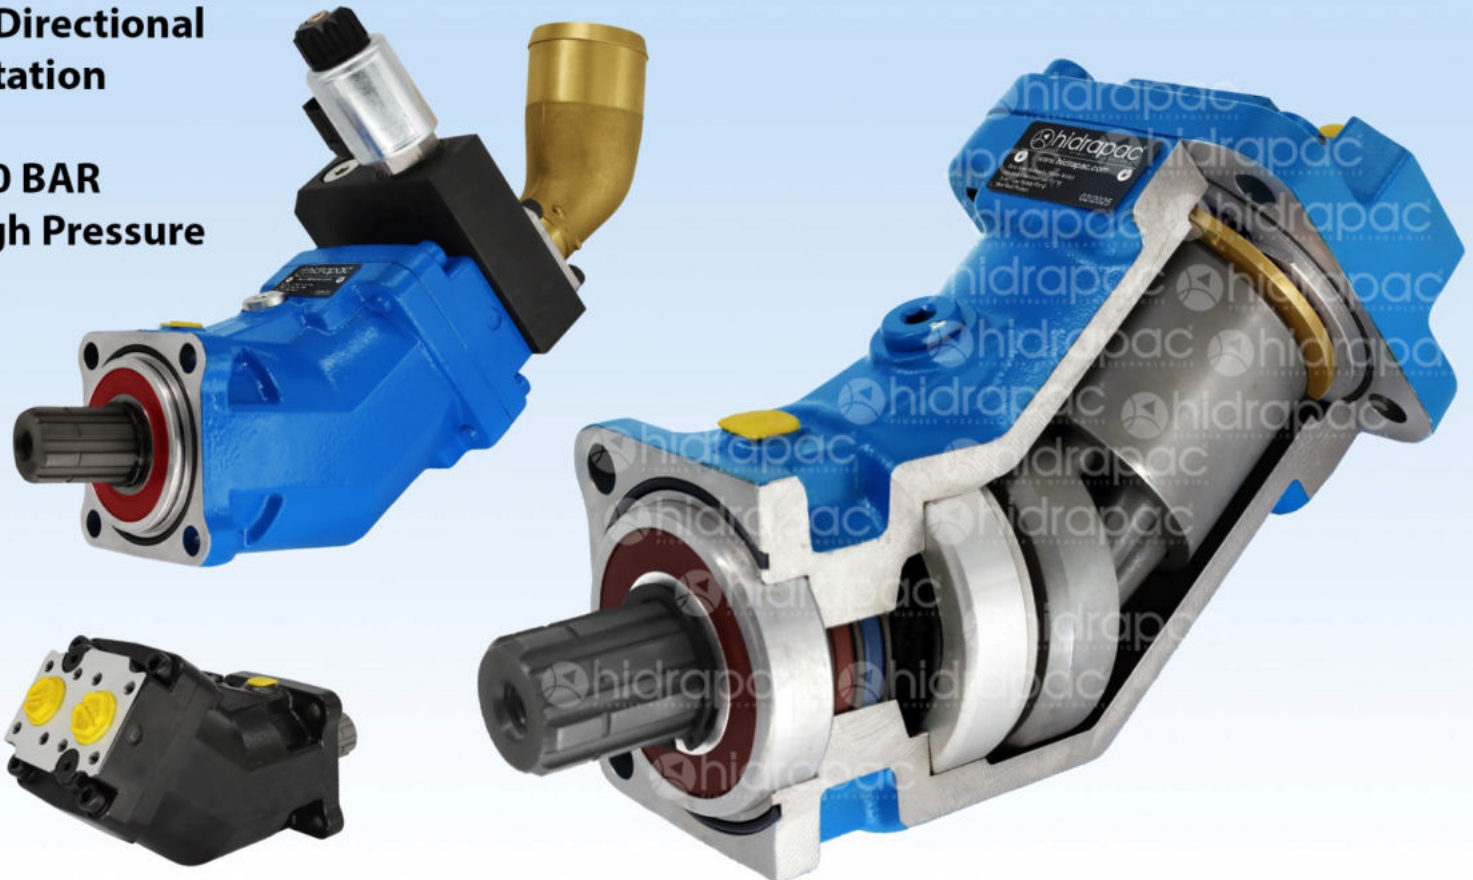

Hidrapac **Store**

www.HIDRAPAC.com.tr

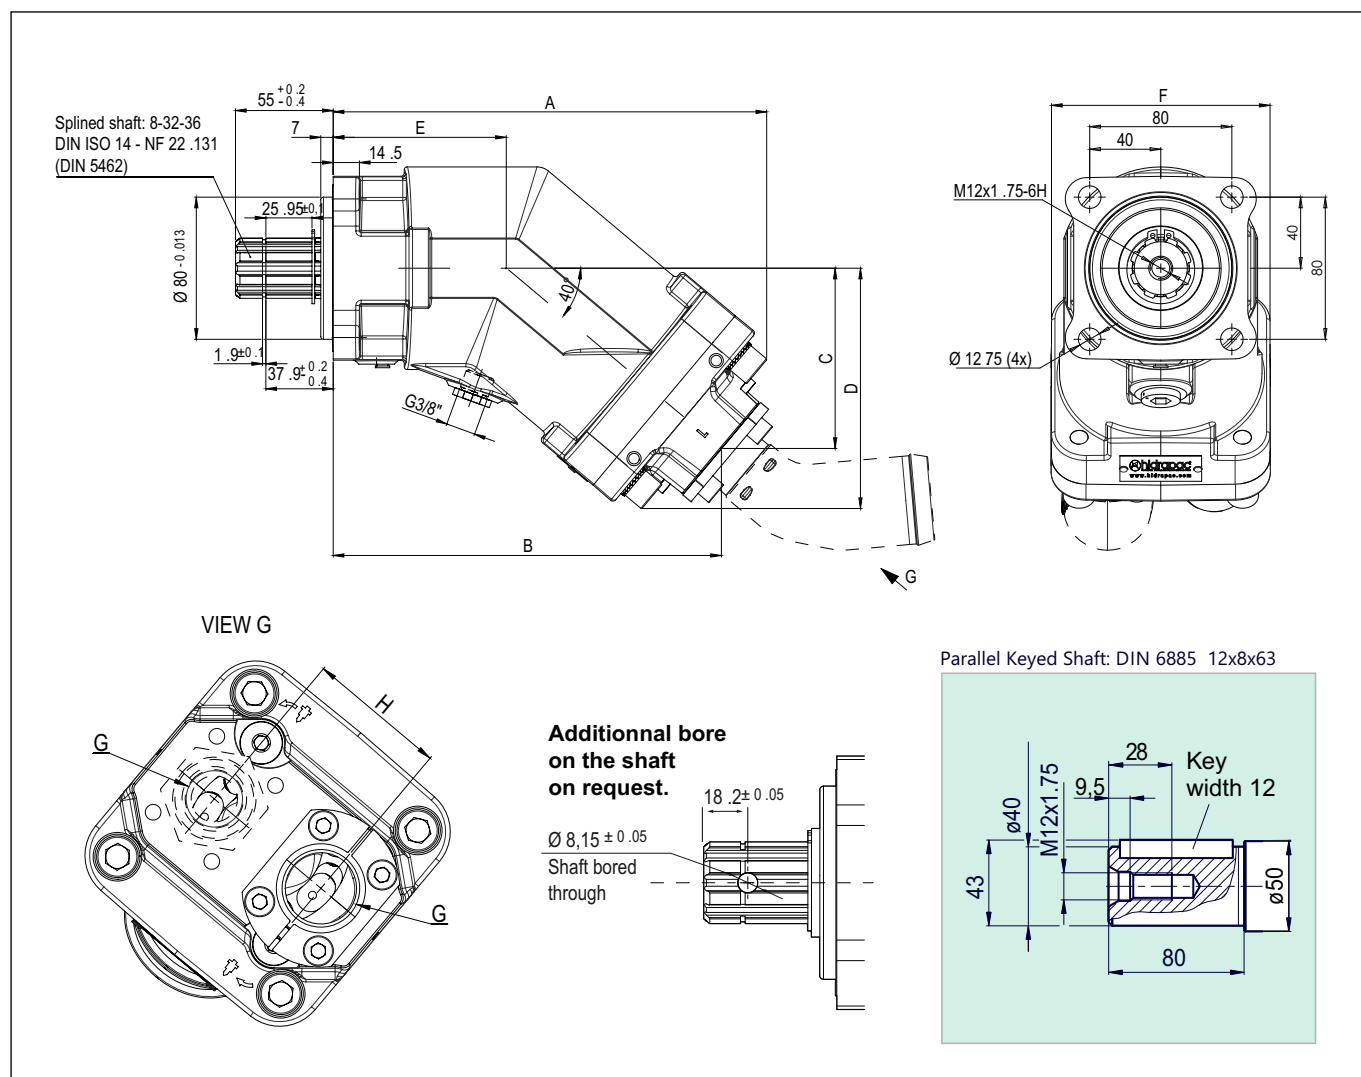


Pump MODEL	DISPL. (cc)	A	B	C	D	E	F	G	H
5 cc	5.1	196.7	177.8	77.1	103.9	85.7	108	G 3/4"	54
10 cc	10.2	196.7	177.8	77.1	103.9	85.7	108	G 3/4"	54
12 cc	12.0	196.7	177.8	77.1	103.9	85.7	108	G 3/4"	54
18 cc	18.0	196.7	177.8	77.1	103.9	85.7	108	G 3/4"	54
25 cc	25.0	196.7	177.8	77.1	103.9	85.7	108	G 3/4"	54
32 cc	32.0	202.8	184.0	82.3	109.1	85.7	108	G 3/4"	54
41 cc	41.0	202.8	184.0	82.3	109.1	85.7	108	G 3/4"	54
50 cc	50.3	214.4	195.5	92.0	118.9	85.7	108	G 3/4"	54
56 cc	56.0	214.4	195.5	92.0	118.9	85.7	108	G 3/4"	54
63 cc	63.0	214.4	195.5	92.0	118.9	85.7	108	G 3/4"	54
80 cc	80.4	241.7	220.9	103.5	133.3	97.4	123	G 1"	60
108 cc	108	241.7	222.5	104.8	133.3	97.4	123	G 1"	60
130 cc	130	244.0	224.8	106.7	135.2	97.4	123	G 1"	60

Characteristics of the K2FA - DIN Flange Bent Axis Pumps

Pump MODEL	DISPL. (cc)	MAX. PEAK/ CONTINUOUS PRESSURE (bar)	MAXIMUM SPEED (rpm)	MAX.TORQUE ABSORBED AT 380 BAR (N.m)	WEIGHT WITHOUT INLET FITTING (kg)	WEIGHT WITH 2" INLET FITTING (kg)	TORQUE WITHOUT FITTING (N.m)	TORQUE WITH FITTING (N.m)
5 cc	5.1	420 / 380	3300	60	9.00	9.40	8.20	8.60
10 cc	10.2	420 / 380	3200	68	9.00	9.40	8.65	9.05
12 cc	12.0	420 / 380	3150	76	9.20	9.60	8.74	9.14
18 cc	18.0	420 / 380	2900	114	9.30	9.70	8.79	9.19
25 cc	25.0	420 / 380	2750	159	11.00	11.40	8.89	9.29
32 cc	32.0	420 / 380	2700	204	11.10	11.50	11.10	11.50
41 cc	41.0	420 / 380	2550	261	11.20	11.60	11.15	11.55
50 cc	50,3	420 / 380	2450	318	11.30	11.70	11.75	12.15
56 cc	56,0	420 / 380	2400	375	11.35	11.75	11.80	12.20
63 cc	63.0	420 / 380	2300	401	11.45	11.85	11.85	12.25
80 cc	80,4	420 / 380	2150	509	14.80	15.20	17.80	18.30
108 cc	108	420 / 380	1900	687	14.90	15.30	17.92	18.42
130 cc	130	420 / 380	1750	827	15.30	15.70	18.70	19.50

Direction of Rotation; Bi-Directional


The Pumps rotate clockwise or counter-clockwise depending on the direction of hydraulic flow entering the Pump.

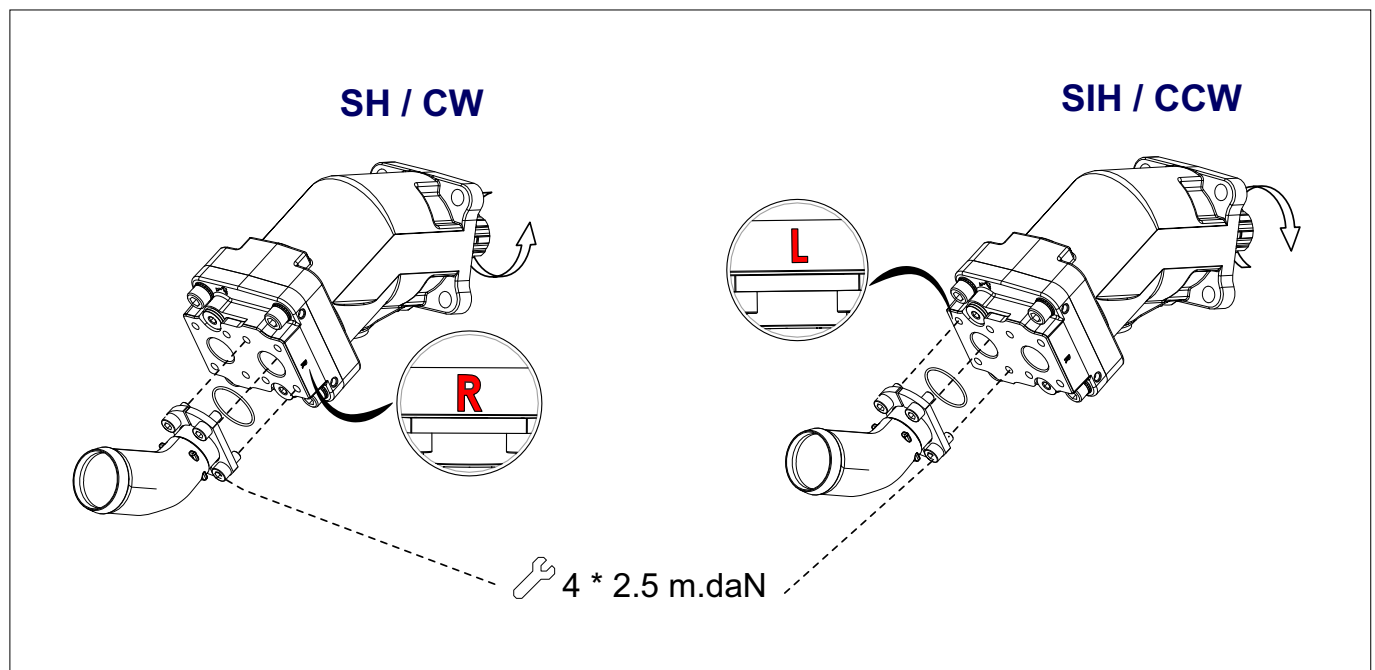



Ordering Code; K2FA - DIN Flange Bent Axis Pumps

Model Code	Displacement	Shaft Type	Flange Type	Rotation	Sealing
K2FA	108	S	H4	BD	V
K2FA Bent Axis Hydraulic Pump DIN Flange	5	S Splined Shaft (default) 8x32x36 DIN ISO 14NF	H4 ISO 7653 Ø80 4 Bolt Flange	BD Direction of Rotation Bi-Directional	V Viton High Pressure Seal
	10				
	12				
	18				
	25				
	32				
	41				
	50	K Parallel Keyed Shaft (special) DIN 6885			N Nitrile Seal 5/10 Bar
	56				
	63				
	80				
	108				
	130				


SH / CW



SIH / CCW

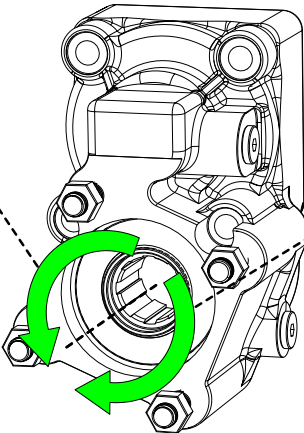

Performance, Torque, Speed and Pressure Charts

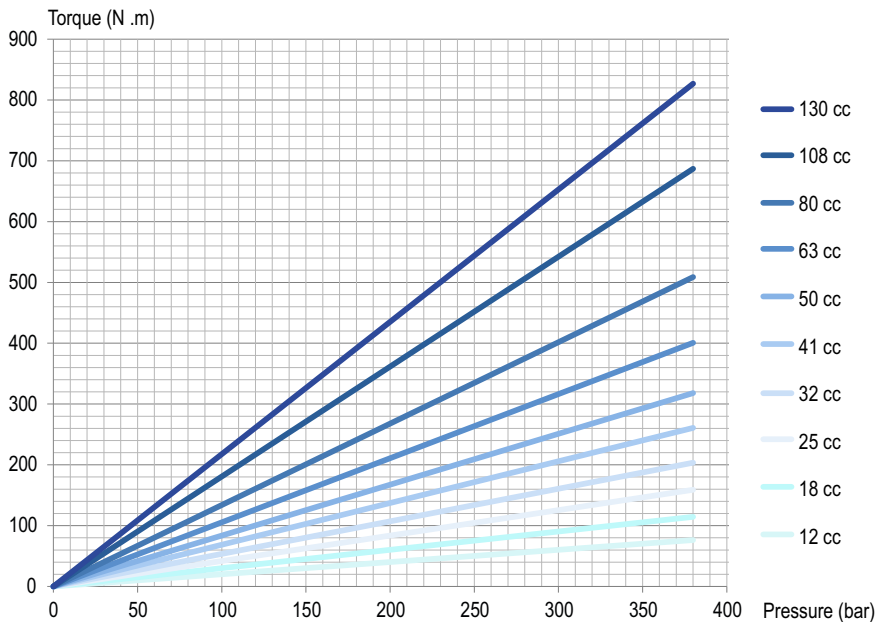


$$C = \frac{\Delta Cyl \times P}{62.8 \times \eta_{meca}}$$

With:

C = Torque in N m
 Cyl = Displacement in cc/rev
 ΔP = Differential pressure in bar
 η_{meca} = Mechanical efficiency


► Flow as a function of rotating speed

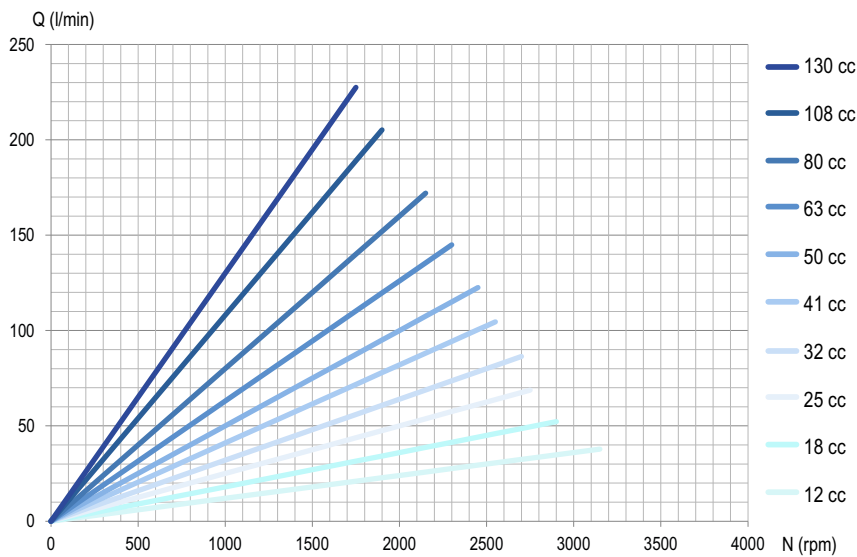

$$Q = \frac{N \times Cyl \times \eta_{vol}}{1000}$$


With:

Q = Flow in l/min
 N = Speed in rpm
 η_{vol} = Volumetric efficiency
 Cyl = Displacement in cc/rev

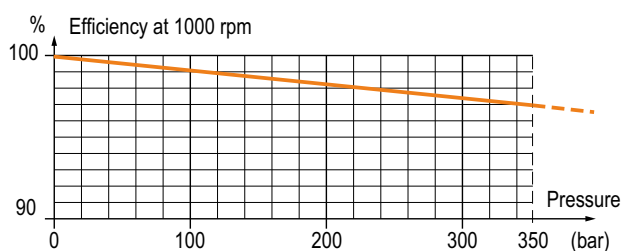


Performance, Torque, Speed and Pressure Charts

Compare Table of Torque

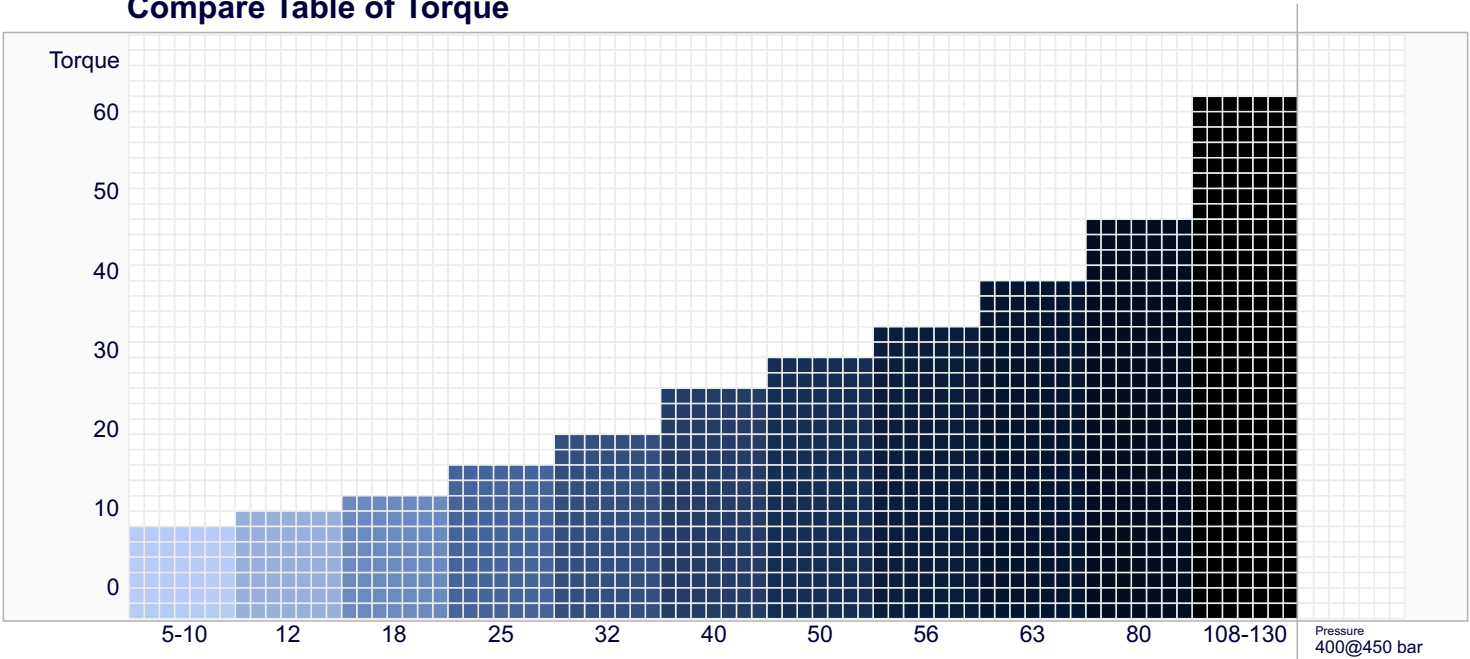


Efficiency of Bent Axis Pumps (1000 rpm)

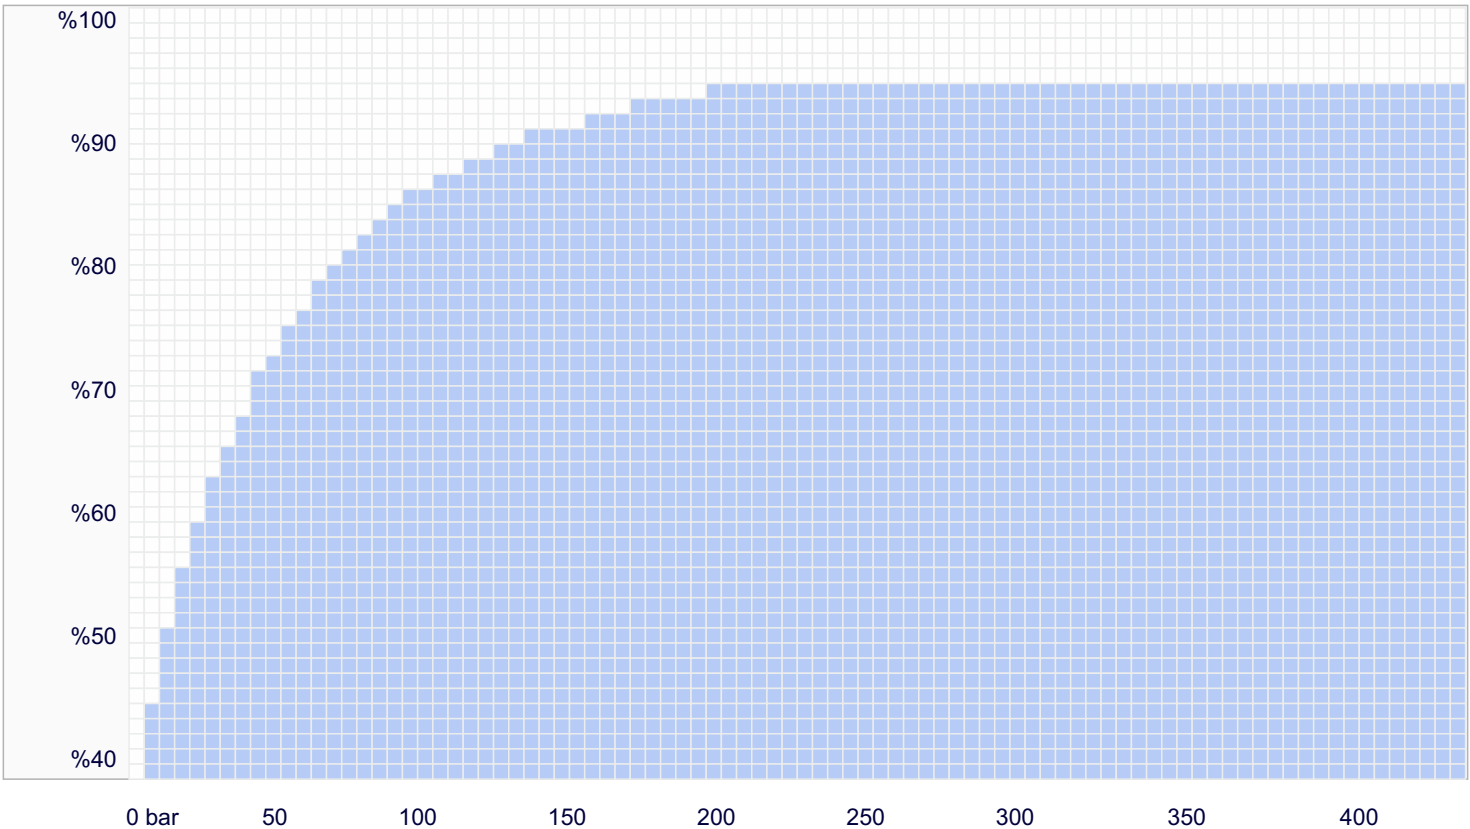


Suction Fittings for K2FA (DIN) Bent Axis Pumps

45° elbow fittings kit







Reference	Ø hose	Ø A	E	F
450039	1 1/2"	39.1	91.7	46.7
450043	42	43	91.7	46.7
450046	1 3/4"	46	91.7	46.7
450051	2"	51.8	108.4	54.4
450064	2 1/2"	64.5	125.2	62.2

90° elbow fittings kit

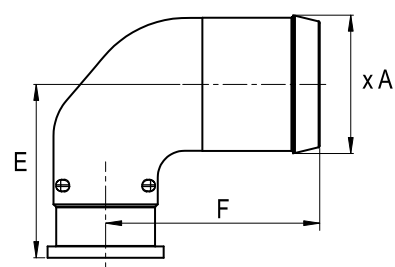

Reference	Ø hose	Ø A	E	F
900039	1 1/2"	39.1	58.6	79.5
900051	2"	51.8	64.9	80.2
900064	2 1/2"	64.5	71.3	87.5

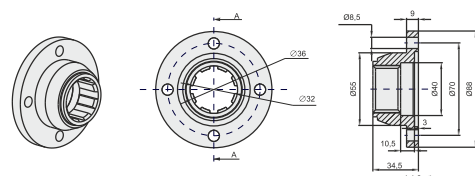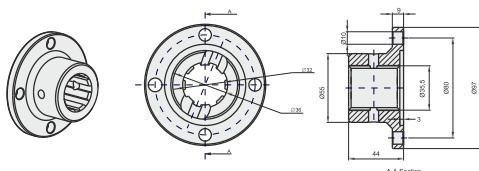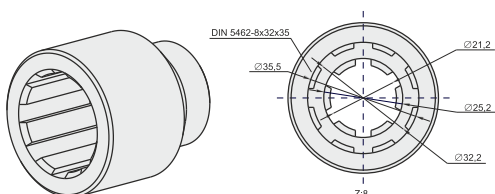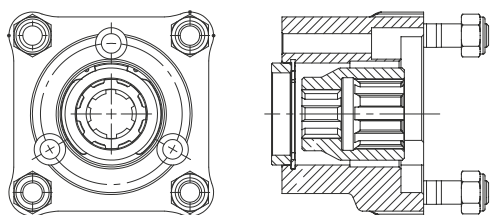

Inlet Fittings & Installation Parts

- Split Flange
- Seal
- Screw



By-Pass Valves

- 12 V
- 24 V




Hydraulic Adapters

- PTO Piston Pump Adapter
- PTO Gear Pump Adapter
- Long / Short Adapter



Flanges


- 1120 (6 Spline)
- 1120 (8 Spline)
- 1300 (6 Spline)
- 1300 (8 Spline)



Couplers


- 6 x 8 Couplar
- 6 x 8 Couplar (Long)
- 8 x 8 Couplar
- 8 x 8 Couplar (Long)

ByPass Valve for K2FA (DIN) Bent Axis Pumps

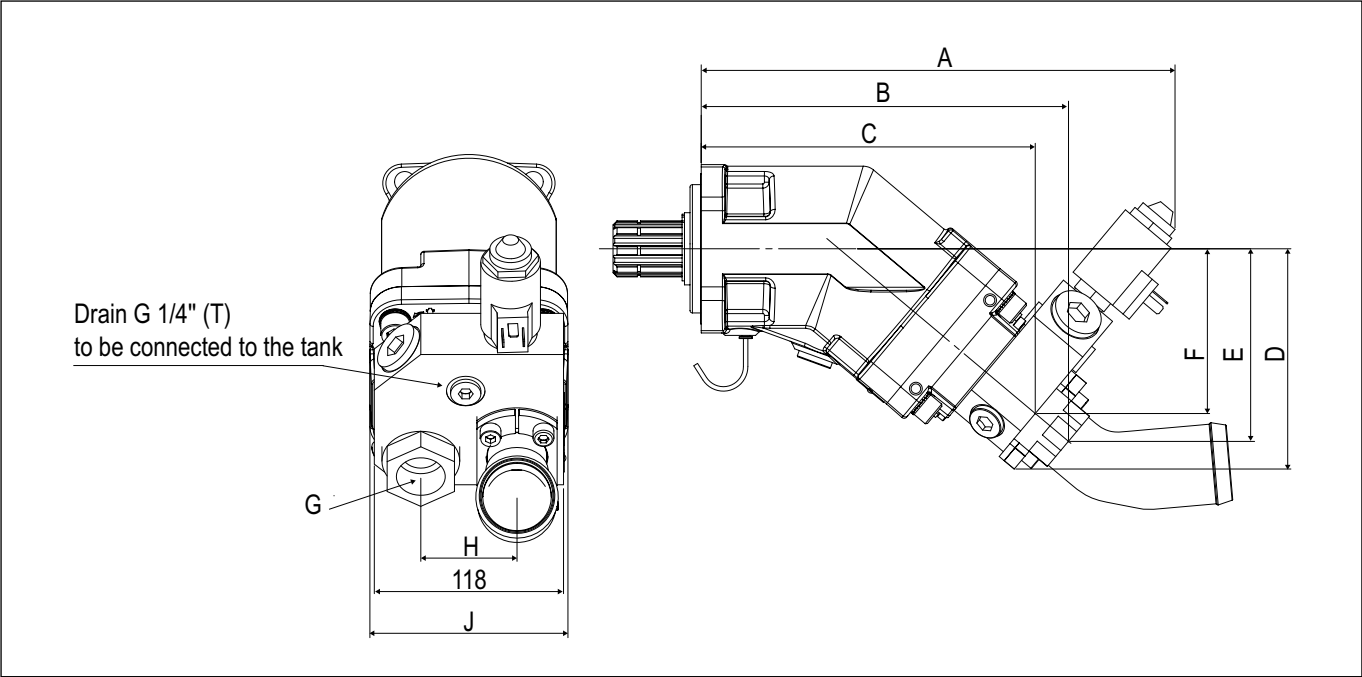

Pump MODEL	DISPL. (cc)	A	B	C	D	E	F	G	H	J
5 cc	5.1	289.35	223.04	202.19	132.20	114.72	97.58	G 3/4"	54	108
10 cc	10.2	289.35	223.04	202.19	132.20	114.72	97.58	G 3/4"	54	108
12 cc	12.0	289.35	223.04	202.19	132.20	114.72	97.58	G 3/4"	54	108
18 cc	18.0	289.35	223.04	202.19	132.20	114.72	97.58	G 3/4"	54	108
25 cc	25.0	289.35	223.04	202.19	132.20	114.72	97.58	G 3/4"	54	108
32 cc	32.0	295.50	229.00	208.30	137.30	120.10	102.70	G 3/4"	54	108
41 cc	41.0	295.50	229.00	208.30	137.30	120.10	102.70	G 3/4"	54	108
50 cc	50,3	307.10	240.40	220.00	147.10	129.70	112.50	G 3/4"	54	108
56 cc	56,0	307.10	240.40	220.00	147.10	129.70	112.50	G 3/4"	54	108
63 cc	63.0	307.10	240.40	220.00	147.10	129.70	112.50	G 3/4"	54	108
80 cc	80,4	334.00	269.00	246.70	157.80	143.90	124.80	G 1"	60	123
108 cc	108	334.00	269.00	246.70	157.80	143.90	124.80	G 1"	60	123
130 cc	130	336.30	271.3	249.00	159.70	145.80	126.70	G 1"	60	123

ByPass Valve for K2FA (DIN) Bent Axis Pumps

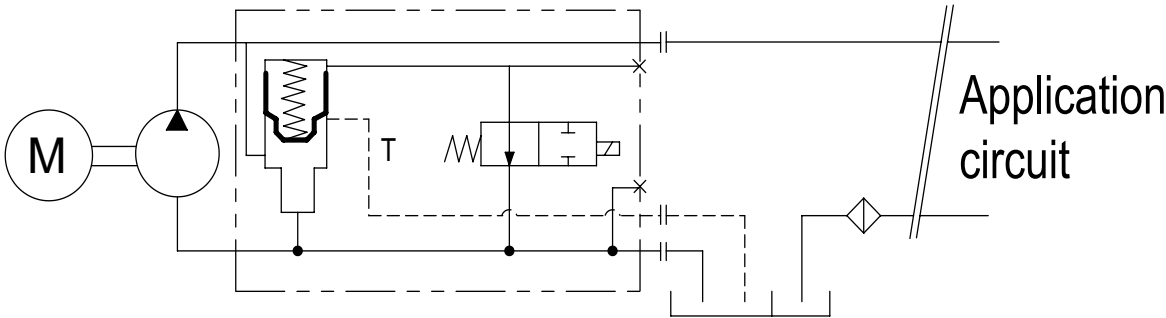

Pump MODEL	DISPL. (cc)	WEIGHT WITHOUT INLET FITTING (kg)	WEIGHT WITH 2" INLET FITTING (kg)	TORQUE WITHOUT FITTING (N.m)	TORQUE WITH FITTING (N.m)
5 cc	5.1	9.00	9.40	8.20	8.60
10 cc	10.2	9.00	9.40	8.65	9.05
12 cc	12.0	9.20	9.60	8.74	9.14
18 cc	18.0	9.30	9.70	8.79	9.19
25 cc	25.0	11.00	11.40	8.89	9.29
32 cc	32.0	11.10	11.50	11.10	11.50
41 cc	41.0	11.20	11.60	11.15	11.55
50 cc	50,3	11.30	11.70	11.75	12.15
56 cc	56,0	11.35	11.75	11.80	12.20
63 cc	63.0	11.45	11.85	11.85	12.25
80 cc	80,4	14.80	15.20	17.80	18.30
108 cc	108	14.90	15.30	17.92	18.42
130 cc	130	15.30	15.70	18.70	19.50

40° bent axis design giving high power, small overall dimensions, optimum efficiency and economic design. Flange and shaft designed for direct mounting on truck gearbox PTO's. The fixed displacement bent axis pumps generates a hydraulic fluid flow. It is designed for use in trucks, commercial vehicles and all stationary hydraulic applications. The Pump a fixed pump with rotary group in bent-axis design open circuits. Flow is proportional to drive speed and displacement.

For axial piston units with bent-axis design, the Pistons are arranged diagonally with respect to the drive shaft. The pump covers the whole displacement range 5 to 130 cm³/rev. The pump has been developed with modern styling and design to satisfy market demand as to designed new generation plate and pistons with give high flow performance, high pressures with high efficiency and very small dimensions.

The pump is available both to DIN and SAE world standards and can be mounted either directly at the gear box or via a drive shaft. If necessary it can also be augmented with a by-pass valve. Other brand bent axis pumps compatible and interchangeable with DIN bent axis pumps. Refer to the data sheet and order confirmation for the technical data, operating conditions and operating limits of the bent axis piston pumps.

Formulas			
Pump Output Flow	GPM	$GPM = (\text{Speed (rpm)} \times \text{disp. (cu. in.)}) / 231$	$GPM = (n \times d) / 231$
Pump Input Horsepower	HP	$HP = GPM \times \text{Pressure (psi)} / 1714 \times \text{Efficiency}$	$HP = (Q \times P) / 1714 \times E$
Pump Efficiency	E	Overall Efficiency = Output HP / Input HP	Eoverall = HPOut / HPIn X 100
		Overall Efficiency = Volumetric Eff. × Mechanical Eff.	EOverall = EffVol. × EffMech.
Pump Volumetric Efficiency	E	Volumetric Efficiency = Actual Flow Rate Output (GPM) / Theoretical Flow Rate Output (GPM) × 100	EffVol. = QAct. / QTheo. X 100
Pump Mechanical Efficiency	E	Mechanical Efficiency = Theoretical Torque to Drive / Actual Torque to Drive × 100	EffMech = TTheo. / TAct. × 100
Pump Displacement	CIPR	Displcmnt (In. ³ / rev.) = Flow Rate (GPM) × 231 / Pump RPM	CIPR = GPM × 231 / RPM
Pump Torque	T	Torque = Horsepower × 63025 / RPM	T = 63025 × HP / RPM
		Torque = Pressure (PSIG) × Pump Displacement (CIPR) / 2π	T = P × CIPR / 6.28

- Horsepower for driving a pump** : For every 1 hp of drive, the equivalent of 1 gpm @ 1500 psi can be produced.
- Horsepower for idling a pump** : To idle a pump when it is unloaded will require about 5% of it's full rated power
- Wattage for heating hydraulic oil** : Each watt will raise the temperature of 1 gallon of oil by 1° F. per hour.
- Flow velocity in hydraulic lines** : Pump suction lines 2 to 4 feet per second, pressure lines up to 500 psi - 10 to 15 ft./sec., pressure lines 500 to 3000 psi - 15 to 20 ft./sec.; all oil lines in air-over-oil systems; 4 ft./sec.

Hydraulic Pumps



K2FA (DIN)

BENT AXIS PISTON PUMPS



K2FL (DIN)

ALUMINUM BODY
BENT AXIS PISTON PUMPS



A2FD (DIN)

DUAL FLOW
BENT AXIS PISTON PUMPS



A2FO (ISO)

BENT AXIS PISTON PUMPS



A2FS (SAE)

BENT AXIS PISTON PUMPS



AXVP Series

VARIABLE DISPLACEMENT
PISTON PUMPS



A3PP Series

AXIAL PISTON PUMPS



A3PH Series

HIGH PRESSURE
PISTON PUMPS



ByPass Valve

FOR
BENT AXIS PISTON PUMPS



LS Adapters

FOR
VARIABLE PISTON PUMPS

Hydraulic Motors



K2FM (DIN)

BENT AXIS PISTON MOTORS



A2FM (ISO)

BENT AXIS PISTON MOTORS



A2MS (SAE)

BENT AXIS PISTON MOTORS



A2FE (FixedPlug)

BENT AXIS PISTON MOTORS



Anti Cavitation

VALVE
BENT AXIS PISTON MOTORS


ByPass Valve

for Bent Axis Piston Pumps



LS Adapter

for Variable Displacement Piston Pump

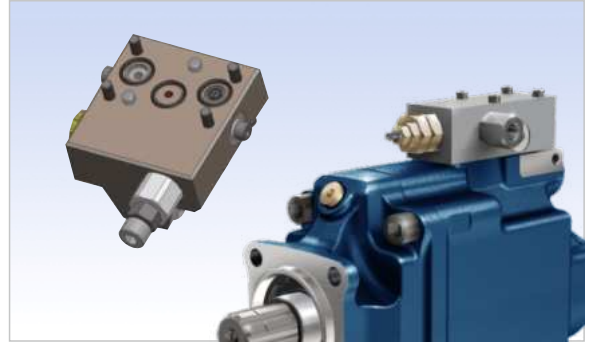

Suction Fittings

for Bent Axis Piston Pumps



Flushing Valve

for Bent Axis Piston Motors



Adapter

for Bent Axis Piston Pumps



Flange, Couplar

for Bent Axis Piston Pumps



Hydraulic Pumps, Hydraulic Motors

Bent Axis Hydraulic Piston Pumps, Bent Axis Piston Motors,
Dual Flow Hydraulic Piston Pumps, Variable Displacement Piston Pumps,
High Pressure Piston Pumps, Straight Axial Piston Pumps..



Address;

HIDRAPAC HYDRAULIC PUMP & MOTORS

Address; (PRODUCTION)

Fevzicakmak Mah. Sila Cad. Kobisan 3 San. Sit.
No: 73 / C Karatay – Konya, PO Code; 42050, Turkiye

Address; (ASSEMBLE, SHIPMENT)

Fevzicakmak Mah. Sila Cad. Kobisan 3 San. Sit.
No: 71 / AD Karatay – Konya, PO Code; 42050, Turkiye

Phone; +90 551 111 77 44